

WO 21-1059

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)


PCT

(10) International Publication Number
WO 03/100218 A1

- (51) International Patent Classification⁷: E21B 47/06, 47/01, 49/10
- (21) International Application Number: PCT/EP03/50102
- (22) International Filing Date: 10 April 2003 (10.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0209350.8 24 April 2002 (24.04.2002) GB
- (71) Applicant (for FR only): SERVICES PETROLIERS SCHLUMBERGER [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).
- (71) Applicant (for JP, NL only): SCHLUMBERGER HOLDINGS LIMITED [—/—]; PO BOX 71, Craigmuir Chambers Road Town (VG).
- (71) Applicant (for CA, GB only): SCHLUMBERGER CANADA LIMITED [CA/CA]; 24th-Floor - Monenco Place, 801 6th Avenue SW, Calgary, Alberta T2P 3W2 (CA).
- (71) Applicant (for BF, BJ, CF, CG, CI, CM, CZ, GA, GN, GQ, GW, IN, LT, MA, ML, MR, NE, SN, TD, TG, TN, VN only): PETROLEUM RESEARCH & DEVELOPMENT N.V. [NL/NL]; De Ruyterkade 26, Willemstad, Curacao (AN).
- (71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IS, IT, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LU, LV, MC, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, SZ, TJ, TM, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): SCHLUMBERGER TECHNOLOGY B.V. [NL/NL]; Parkstraat 83-89, NL-2514 JG The Hague (NL).

[Continued on next page]

(54) Title: DEPLOYMENT OF UNDERGROUND SENSORS

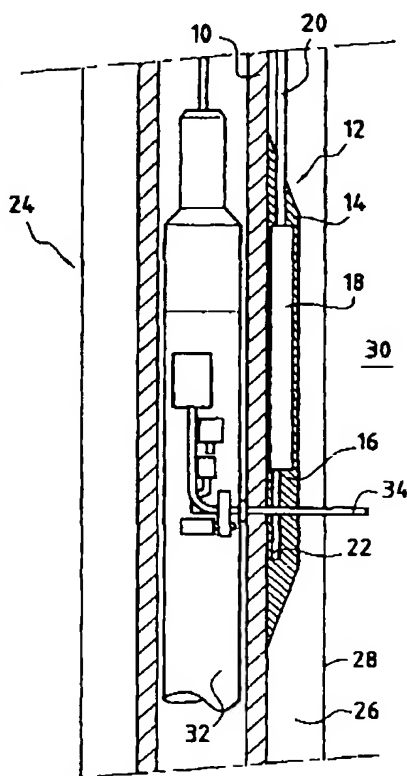

(57) Abstract: A method of installing a sensor located in a chamber on the outside of a casing, comprising the steps of positioning the casing in a well, cementing the casing in position, positioning a drilling tool inside the casing level with the chamber, drilling through the casing, chamber and cement into the formation surrounding the well so as to create a fluid communication path, and sealing the hole drilled in the casing.

WO 03/100218 A1

BEST AVAILABLE COPY